
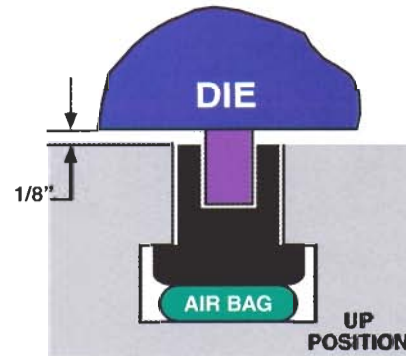
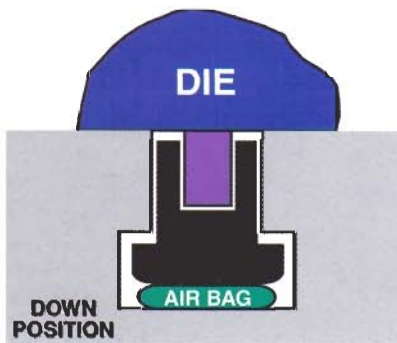


Tee-Lift Quick Die Change System

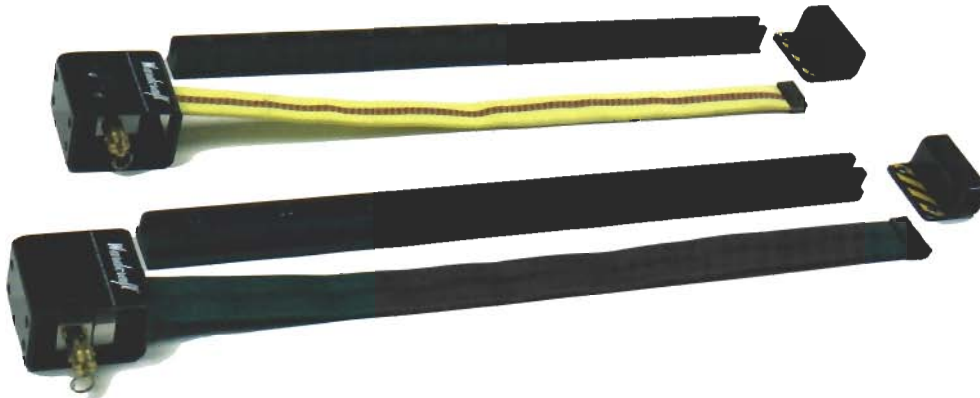

Die Lifting Systems Available

- TL** Tee-Lift Systems for standard applications, custom milled to fit your 1" or 28mm T-slot.
- TLT** Tee-Lift System for standard applications custom milled to fit your 3/4" or 22mm T-slot.
- HTTL** Tee-Lift System for high temperature applications. Special air bag material and rollers for operation up to 350° F.
- DTL** Self contained Tee-Lift System for applications outside of the bolster.
- TLLR** Tee-Lift System that utilizes rollers oriented 90° to the T-slot direction to allow side-to-side movement of die.
- DGL** Larger capacity lift rails for die sets weighing up to 80 tons.

Additional Quick Die Change Components

- Stationary Roller Rails
- Mechanical Die Clamps
- Bolster Extensions
- Die Carts
- Die Racks
- Die Tables
- Pop-up Die Locator Pins


Each Tee-Lift is customized to fit your T-slot

Required Information

- Determine the heaviest weight die you wish to carry.
- Measure your T-slot dimensions (as shown A, B, C, D in diagram).
- Determine PSIG of plant air you can count on.
- NOTE: System has minimum T-slot restrictions and die requires smooth rolling surface to maximize efficiency.

T-Slot Dimensions

*Measure dims in three places: each end and middle of T-slot

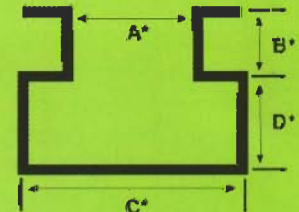

Patents #4498384, #4691554, #5947676



Since 1897

WARDCRAFT
Conveyors & Quick Die Change

ONE WARDCRAFT DRIVE ■ SPRING ARBOR ■ MICHIGAN 49283-9757 ■ tel 800-782-2779
fax 517-750-2244 ■ www.quickdiechange.com or www.wardcraftconveyor.com